



**Pump
Wrxs &
Controls**

281-612-WRXS (9797)




WSP™ Self-Primer Pump

Solids Handling Self-Primer Pumps

8 x 8 in. (200 x 200 mm) curve

440 W. 800 S. Salt Lake City, Utah 84110
Phone: (801) 359-8731 Fax: (801) 355-9303

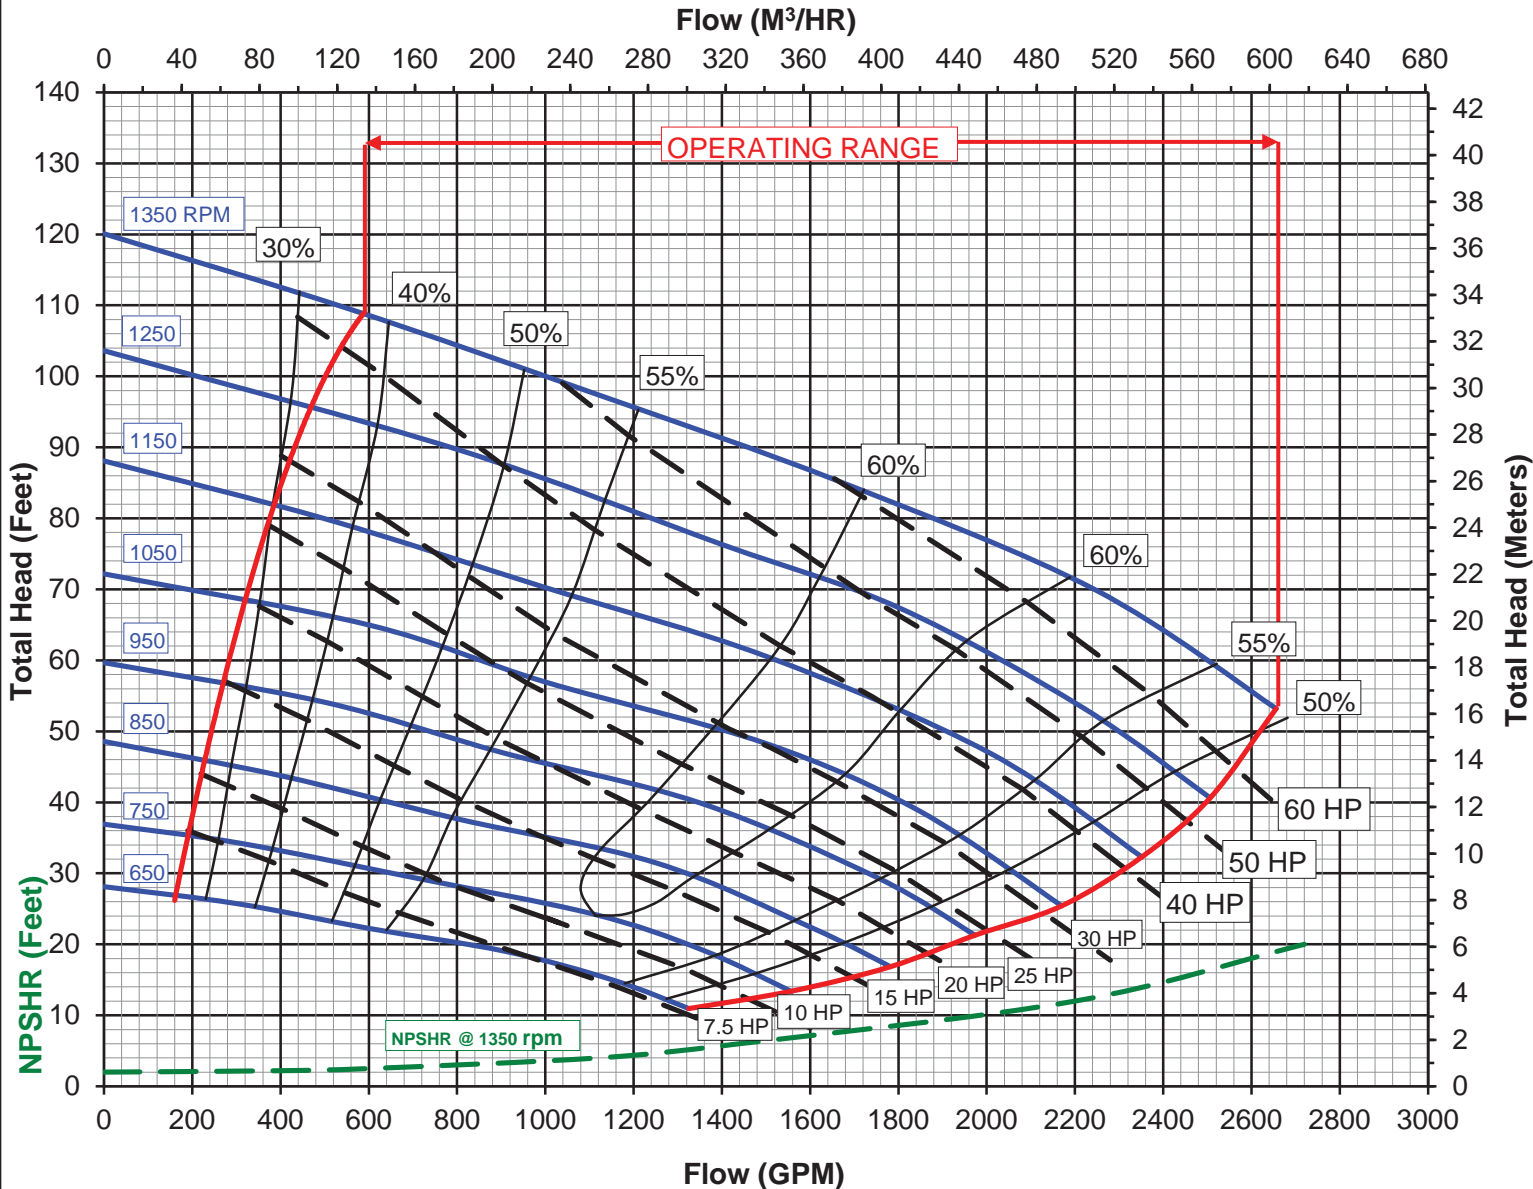

Suction: 8"
Discharge: 8"
Impeller Diameter: 14.75"
Max. Solid Sphere: 3.00"

REPRIMING LIFTS	
RPM	FEET
650	9
750	12
850	15
950	17
1050	20
1150	21
1250	22
1350	23

Determine NPSHR prior to using repriming table. Do not use available suction lifts.

Clear Water Performance

$$BHP = \frac{GPM \times FT \times SG}{3960 \times \text{Efficiency}}$$

$$KW = \frac{M^3 / HR \times M}{367 \times \text{Efficiency}}$$



© Copyright All rights reserved 2002

Certified tests are performed using Hydraulic Institute acceptance level B.

November 2014

**RPM
VARIABLE**

8-WSP